

# A SERIES

High-end smart LED poster



## A SERIES

- Aluminum frame, super lightweight and ultra slim
- Easy for plug-in with USB
- Internet cable and WIFI control available
- Front/rear access
- Intelligent group management
- Multi installation (standing, hanging, wall mounting)
- Adjustable standing angle can be 0°, 5°, 10°, 15°
- IP65, creative DIY



Rental



Profiled Stitching



Noise Free





High Definition




Ultra Slim

CE ETL RoHS EMC

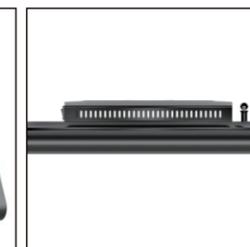

## FEATURES

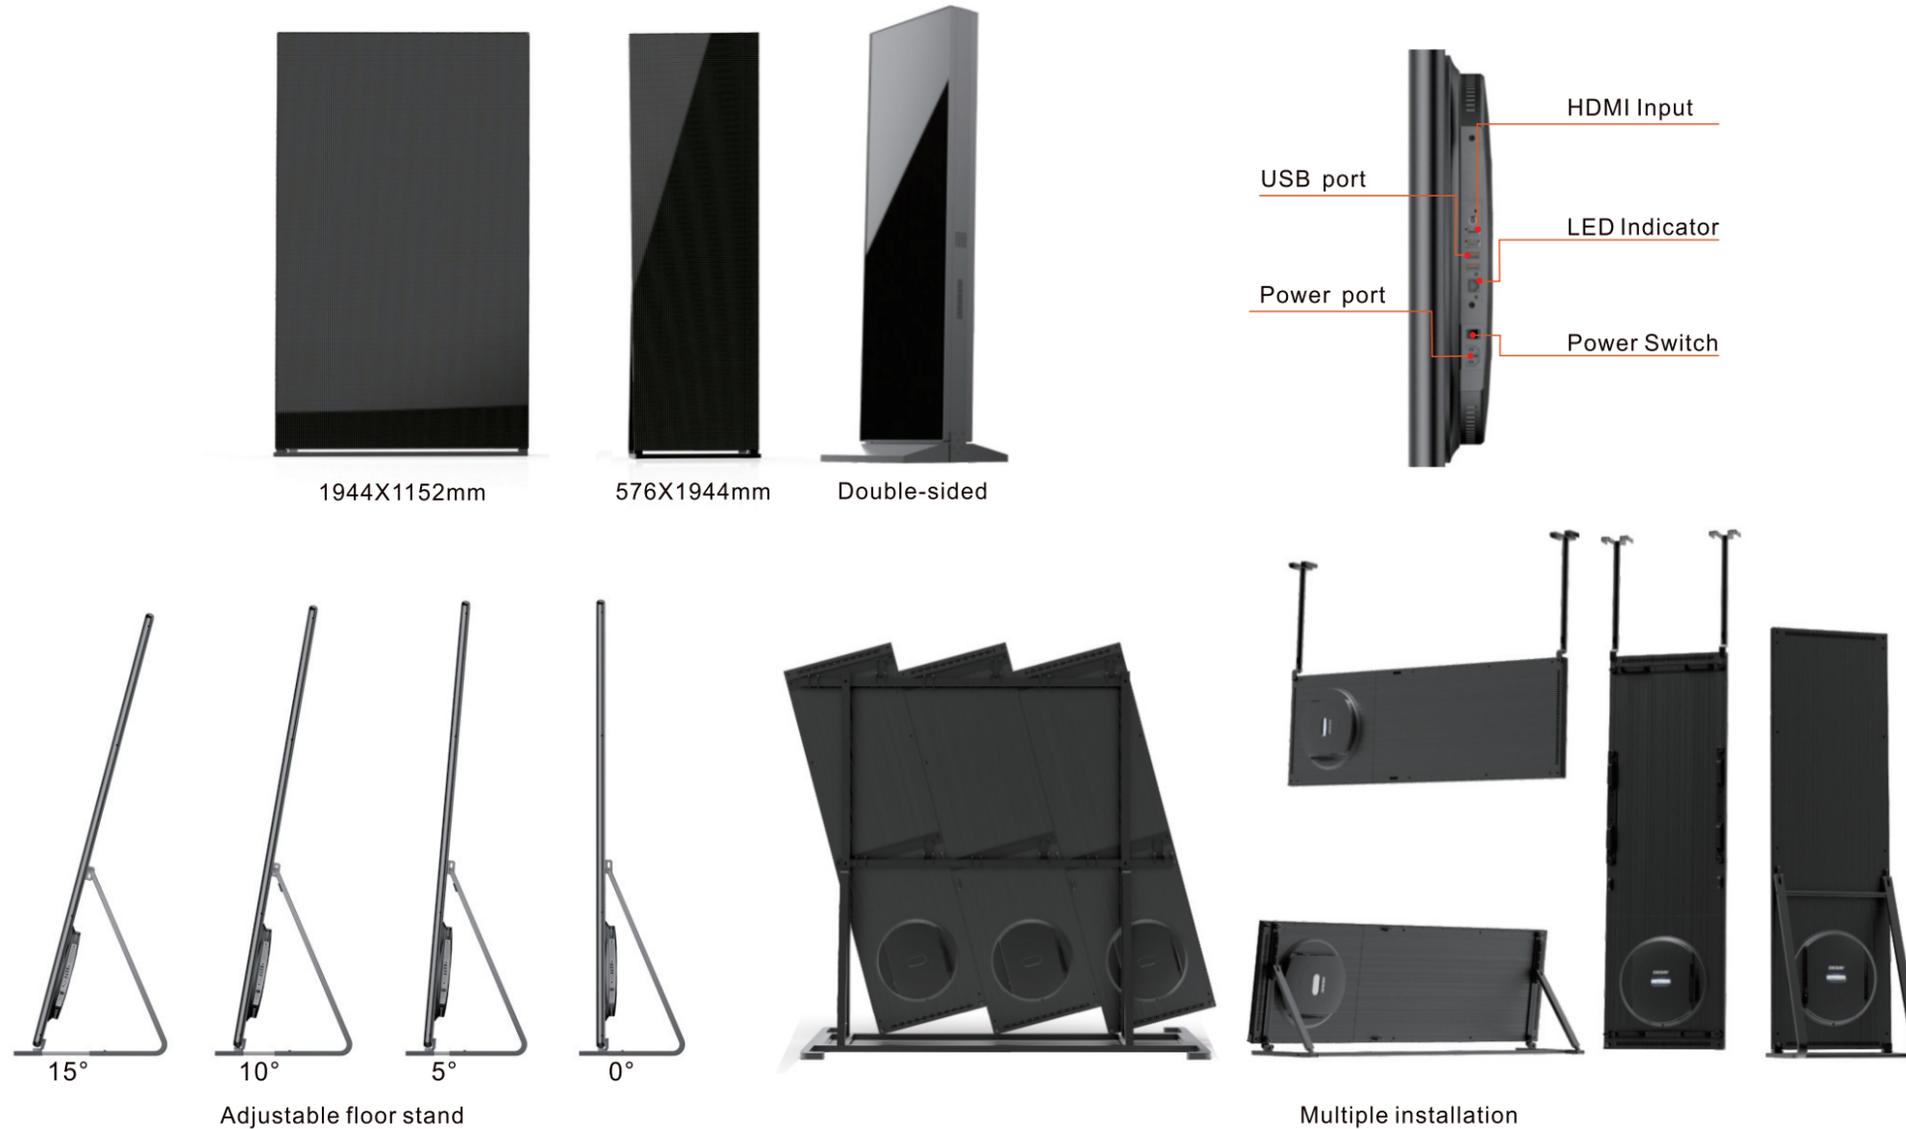

## SPECIFICATIONS

Parameter	Unit	A1.9i	A2.5i	A1.9	A2.5
Pixel pitch	mm	1.995	2.571	1.995	2.571
Brightness	nits	800	1000	3000	3500
Pixel configuration	R/G/B	SMD3 in 1			
Colour temperature	deg.K	6500			
Viewing angle-Horizontal (50% brightness)	deg.	160 (+70/-70)			
Viewing angle-Vertical (50% brightness)	deg.	140 (+70/-70)			
Recommended minimum viewing distance	m	1.9	2.5	1.9	2.5
Panel width	mm	585.4		657	
Panel height	mm	1950.1		2250	
Panel depth	mm	40		85	
Panel area	m <sup>2</sup>	1.2169		1.4783	
Panel material		Aluminum		Aluminum	
Panel weight	Kg	35		67	
Ingress protection (front/rear)	IP	41/30		65/54	
Pixel matrix per panel		288x972	224x756	288x972	224x756
Brightness control		255			
Digital processing	bit	13			
Frame rate	Hertz	50/60			
Display refresh rate	Hertz	1920			
Input voltage	VAC	100~240			
Input power frequency	Hertz	50~60			
Input power (Max.)	W/m <sup>2</sup>	590	492	600	620
Input power (Avg.)	W/m <sup>2</sup>	206	172	210	217
Operating temperature range	deg.C	-10 ~ +40		-20 ~ +45	
Lifetime (50% brightness)	Hour	100,000			